

(19) World Intellectual Property
Organization
International Bureau



Rec'd PCT/PTO 25 APR 2005



(43) International Publication Date
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number
WO 2004/038516 A2

(51) International Patent Classification⁷: G04B 19/04

(21) International Application Number:
PCT/GB2003/004657

(22) International Filing Date: 27 October 2003 (27.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0224874.8 25 October 2002 (25.10.2002) GB

(71) Applicant and

(72) Inventor: LASSALLE, Laurence [GB/GB]; 3 Temple
Fortune House, Finchley Road, London, Greater London
NW11 6XH (GB).

(74) Agent: KING, James, B; Kings Patent Agency Ltd., 73
Farringdon Road, London, Greater London EC1M 3JQ
(GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.



(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: VISUAL INDICATING DEVICE

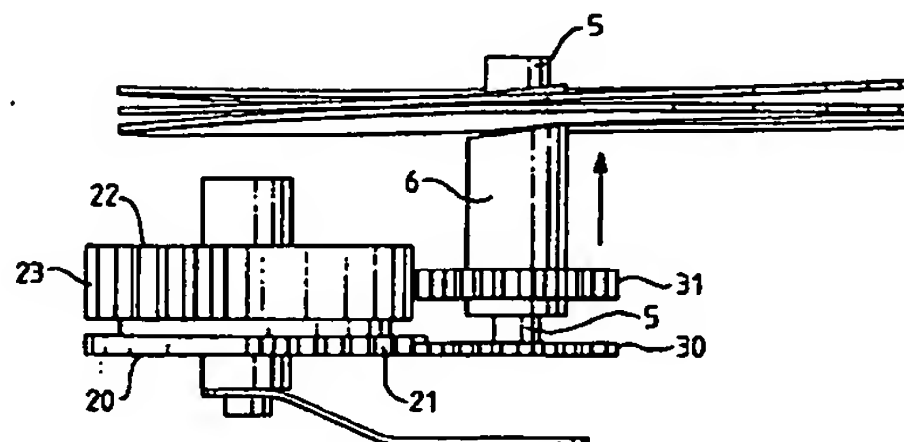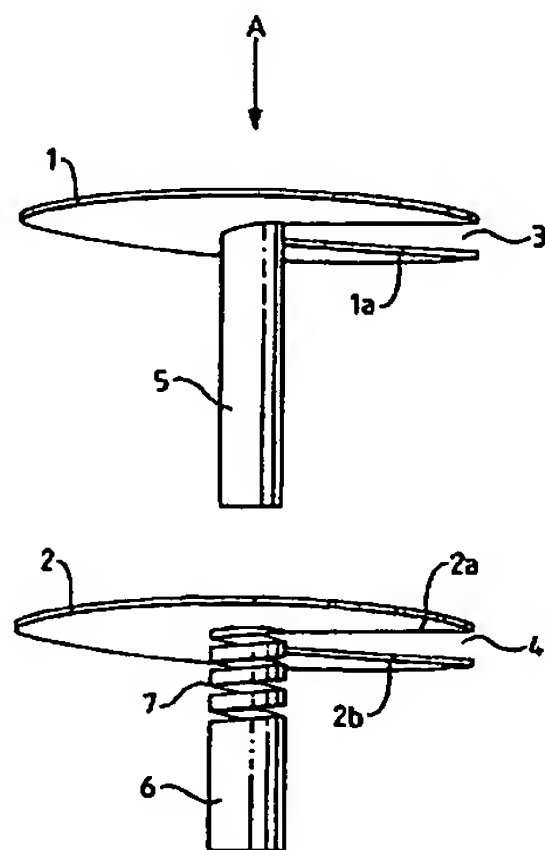

(57) **Abstract:** A visual indicating device comprising two or more discs (1, 2) each disc having a radial discontinuity (3, 4) to thereby form a surface of which the plane progresses in a helical manner, said discs being superposed and interleaved and lying in mutually parallel helical planes, each disc being independently rotatable about a common axis (5, 6) by drive means (20, 22, 30, 31) adapted to selectively rotate one (1) or other (2) of the discs, whereby the discs, when viewed axially face on, display overlapping visually contrasting segments having an area or position representative of the relative positions of rotation of the discs and representing a value of a parameter to be displayed by the device.

WO 2004/038516 A2